

PowerLite® Presenter

Portable Projector/DVD Combo

Key Dates

Launch Kit	October 1, 2009
Announce	October 1, 2009
Product Ship	October 15, 2009
Ad Embargo	November 16, 2009



PRODUCT SETUP


The ultimate presentation tool.

- **Everything you need for powerful multimedia presentations** — built-in DVD player, two 10 W speakers, microphone and headphone input, and more!
- **Impressive, larger-than-life images** — native WXGA resolution (16:10); ideal for widescreen computers
- **USB Plug 'n Play, instant setup** — instantly project images from a Windows PC via a USB connection
- **Cutting-edge connectivity** — supports multiple entertainment devices with HDMI connectivity for amazing HD content, plus component video, digital audio and more
- **PC-free slideshows** — share your presentation and images via a USB thumb drive or hard drive; no computer required
- **Bright enough for any boardroom** — 2500 lumens color light output, 2500 lumens white light output*; Auto Color Mode selects the optimum presentation setting, based on the lighting in the environment
- **Make an impact with amazing color and detail** — 3LCD, 3-chip technology
- **Powerful communication features, no added cost** — built-in, dual 10 W speakers and closed captioning decoder, plus microphone support to prevent voice strain on the part of the presenter
- **Ready to go anywhere** — built-in carrying handle and included carrying case and remote control
- **Low total cost of ownership** — energy-efficient E-TORL® lamp lasts up to 5000 hours**, plus easy-maintenance filter to protect from dust

Product Name	Product Code	UPC
PowerLite Presenter (U.S.)	V11H335120	0 10343 87486 2
PowerLite Presenter (Canada)	V11H335120-F	0 10343 87493 0
Replacement lamp	V13H010L55	0 10343 87487 9
Replacement air filter	V13H134A26	0 10343 87488 6

PowerLite® Presenter

Portable Projector/DVD Combo

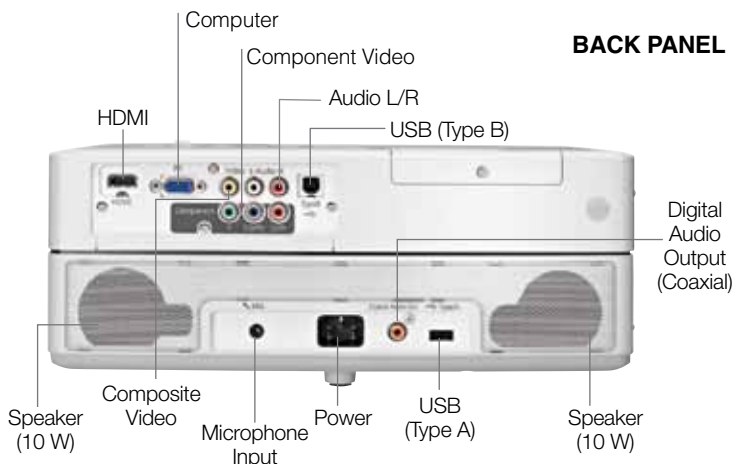

SPECIFICATIONS

Projection System

Epson 3LCD, 3-chip optical engine

Projection Method

Front/rear/mount

Driving Method

Epson Poly-silicon TFT Active Matrix

Pixel Number

1,024,000 dots (1280 x 800)

White Light Output*

2500 lumens (ISO 21118 Standard)

Color Light Output*

2500 lumens

Aspect Ratio

16:10

Native Resolution

1280 x 800 (WXGA)

Resize

640 x 480 (VGA), 1024 x 768 (XGA), 1152 x 864 (SXGA), 1440 x 900 (WXGA+), 1400 x 1050 (SXGA+), 1600 x 1200 (UXGA), 1680 x 1050 (WSXGA+)

Lamp Type

200 W UHE

Lamp Life**

Up to 5000 hours (Eco Mode)

Up to 4000 hours (Normal Mode)

Throw Ratio Range

1.30 – 1.56 (16:10)

1.56 – 1.87 (4:3)

Size (projected distance)

33" – 318" (2.75' – 26.5')

Keystone Correction (Automatic)

Vertical: ± 11 degrees

Keystone Correction (Manual)

Vertical: ± 30 degrees

USB Plug 'n Play

Projector is Mac® compatible via DVI to HDMI or VGA adapter (not included)

Contrast Ratio

Up to 3000:1

Color Reproduction

16.77 million colors

PROJECTION LENS

Type

Manual zoom/Manual focus

F-number

1.58 – 1.72

Focal Length

16.9 mm – 20.28 mm

Zoom Ratio

Optical zoom 1.0 – 1.2

OTHER

Display Performance

NTSC: 480 lines

PAL: 560 line

(Depends on observation of the multi-burst pattern)

Input Signal

NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/SECAM

Interfaces

Computer: D-Sub 15 pin x 1

Component Video: RCA x 3 (Red/Green/Blue)

Composite video: RCA (Yellow) x 1

Audio in: RCA x 2 (White/Red)

USB connector: Type B x 1, Type A x 1 (USB memory)

HDMI port

Microphone input

Headphone output (stereo mini jack)

Digital Audio Output (Coaxial)

Speaker

10 W x 2 (stereo)

Operating Temperature

41 ° to 95 °F (5 ° to 35 °C)

Power Supply Voltage

100 – 240 V ±10%, 50/60 Hz

Power Consumption

310 W, 0.3 W Standby

Fan Noise

34 dB (Normal)

29 dB (Eco)

Security

Kensington®-style lock provision, padlock and security anchor bar

DIMENSIONS (W x D x H)

Including feet: 13.2" x 9.4" x 5.4"

Excluding feet: 13.2" x 9.4" x 5.0"

Weight: 9.5 lb/4.3 kg

REMOTE CONTROL

Features

Source search selection, power, aspect, color mode, volume, e-zoom, A/V mute, menu, page up and down, keystone, mic input level, DVD control, volume

Operating Angle

Right/left: ± 30 degrees

Upper/lower: ± 15 degrees

Operating Distance

19' (6 m)

SUPPORT — THE EPSON CONNECTIONSM

Pre-sales support

U.S. and Canada

800-463-7766

Internet website

www.epson.com

Service Programs

Two-year projector limited warranty, Epson Road Service program, Epson PrivateLine® dedicated toll-free support and 90-day limited lamp warranty

What's In The Box

Power cable, computer cable (VGA), USB cable, soft carrying case, projector remote control, batteries, user manual CD, Quick Setup Sheet, PrivateLine support card, registration card and password protection sticker

ACCESSORY PART NUMBERS

Component to VGA video cable	ELPKC19
S-video cable	ELPSV01
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
Duet™ screen	ELPSC80
Epson DC-10s document camera	ELPDC10S
Kensington security lock	ELPSL01

PACKAGING SPECIFICATIONS

PowerLite Presenter

Dimensions 20" x 13" x 11" (W x D x H)

Weight 14.8 lb

Replacement Lamp

Dimensions 6.3" x 5.6" x 5.6" (W x D x H)

Weight 0.7 lb

Master Carton

Dimensions 28.4" x 13.1" x 6.8" (W x D x H)

Weight 9.3 lb

Units Per Master Carton 10

Replacement Air Filter

Dimensions 5.0" x 4.1" x 1.3" (W x D x H)

Weight 0.1 lb

Master Carton

Dimensions 12.8" x 5.3" x 4.7" (W x D x H)

Weight 1.3 lb

Units Per Master Carton 10

* Light output varies depending upon modes (color and brightness) selected. White light output measured using ISO 21118 standard.

** Lamp life results will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

Better Products for a Better Future™

eco.epson.com

Epson America, Inc.

3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.

3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

www.epson.com

www.epson.ca